Eléments incompressibles **OLIO** – Type: **OS2** (action simple en poussée)
***OLIO** Incompressible Elements – Type: **OS2** (simple action in drag condition)*

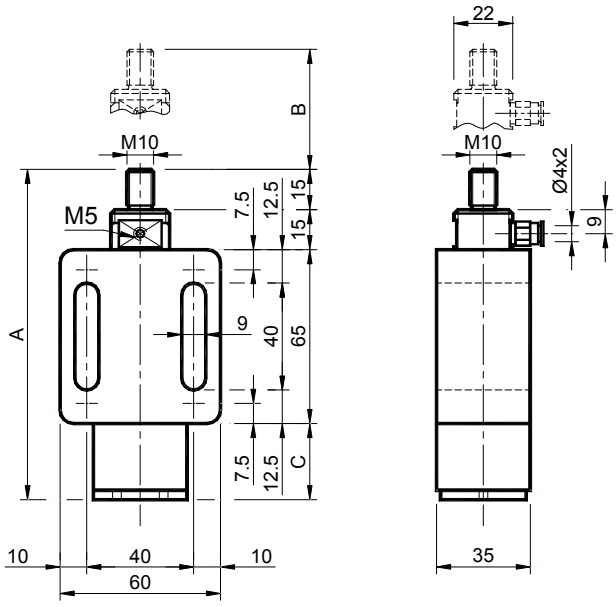

MATERIAUX Corps et cylindre en aluminium, bouchons en acier.
TRAITEMENTS Aluminium sablé, composants métalliques zingués.
UTILISATION Cet article exerce une force axiale au moyen de l'huile alimentée sous pression. Avec les applications oléodynamiques, on obtient des groupes incompressibles qui exercent des forces unidirectionnelles.
Fonctionnement: ACTION SIMPLE (EN POUSSEE).
PRESSION D'EXERCICE: 40 BAR.

***MATERIALS** Body and cylinder made of aluminium, stoppers made of steel.*
***TREATMENTS** Sandblasted aluminium, galvanized metallic components.*
***USE** This item develops its axial force by means of the pressured oil. Incompressible units with their unidirectional force can be obtained through oleodynamical applications.*
Functioning: SINGLE ACTION (IN DRAG CONDITIONS).
OPERATING PRESSURE: 40 BAR.

Type *Type*	Code n°	A	B	C	Newton		Poids *Weight* Kg	Type *Type*	Code n°
					Poussée *Push*	Traction *Pull*			
OS 2-10	OL020010	153	30	53	0÷800	0÷490	0.61	**OD 2-10**	OL020550
OS 2-11	OL020011	168	45	68	0÷800	0÷490	0.77	**OD 2-11**	OL020551
OS 2-12	OL020012	218	95	118	0÷800	0÷490	1.15	**OD 2-12**	OL020552
OS 2-13	OL020013	268	145	168	0÷800	0÷490	1.60	**OD 2-13**	OL020553
OS 2-14	OL020014	318	195	218	0÷800	0÷490	1.80	**OD 2-14**	OL020554

Eléments incompressibles **OLIO** – Type: **OD2** (double action en poussée et en traction)
***OLIO** Incompressible Elements – Type: **OD2** (double action in thrust and drag conditions)*

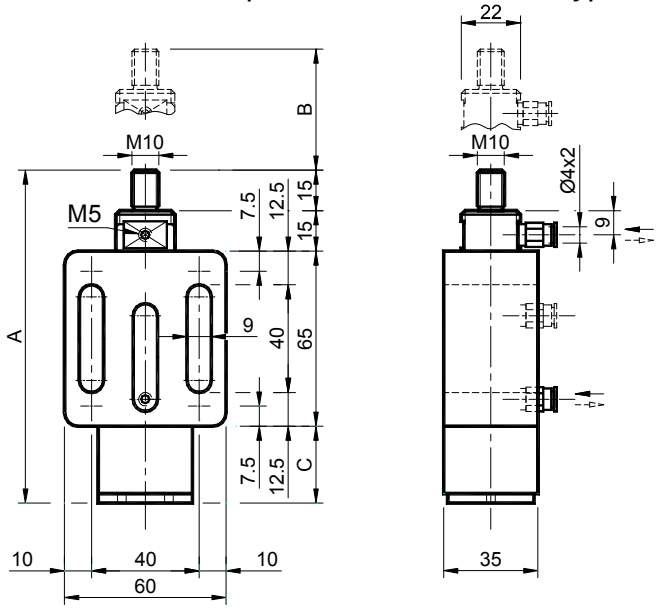

MATERIAUX Corps et cylindre en aluminium, bouchons en acier.
TRAITEMENTS Aluminium sablé, composants métalliques zingués.
UTILISATION Cet article développe la force axiale au moyen de l'huile alimentée sous pression. Avec les applications oléodynamiques, on obtient des groupes incompressibles qui exercent des forces unidirectionnelles.
Fonctionnement: DOUBLE ACTION (EN POUSSEE ET EN TRACTION).
PRESSION D'EXERCICE: 40 BAR.

***MATERIALS** Body and cylinder made of aluminium, stoppers made of steel.*
***TREATMENTS** Sandblasted aluminium, galvanized metallic components.*
***USE** This item develops its axial force by means of the pressured oil. Incompressible units with their unidirectional force can be obtained through oleodynamical applications.*
Functioning: DOUBLE ACTION (IN THRUST AND DRAG CONDITIONS).
OPERATING PRESSURE: 40 BAR.