


## 弹性电机底座 / Elastic motor supports

BM-T 尺寸 40 / BM-T Size 40:

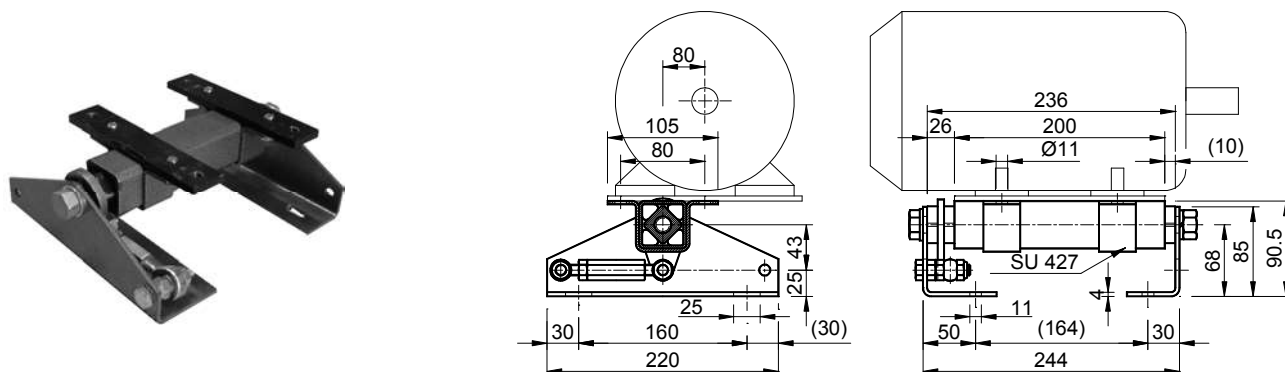


型号 Type	编号 n°	电机尺寸 Motor size	16.5 Hz kW	25 Hz kW	50 Hz kW	重量 Weight [Kg]
BM-T 40 x 80	RE022380	D 90 S/L	0.75-1.10	1.10-1.50	1.50-2.20	4.00
BM-T 40 x 120	RE022384	D 100 L	1.50	2.20-3.00	3.00	4.30
BM-T 40 x 200	RE022392	D 112 M	2.20	4.00	4.00	4.50

弹性组件的中心轴为铝制，其他部件均为镀锌钢。螺栓为镀锌钢。

支撑电机的底盘费用由客户支付。电机可以悬垂方式安装，直至达到最高距离80mm，以便能获得足够幅度的振动。如有必要，可以在底座的另一边重新安置预加负荷装置。

The central pin of the elastic element is made of aluminium while all the remaining components are in oven-painted steel. The bolts and screws is in galvanized steel.  
The baseplate supporting the motor is on charge of the customer. The motor can be overhanging installed until the maximum dimension of 80mm in order to succeed to have oscillation with an enough amplitude. If it is necessary, it is also possible to position again the preloading device on the other side of the baseplate.

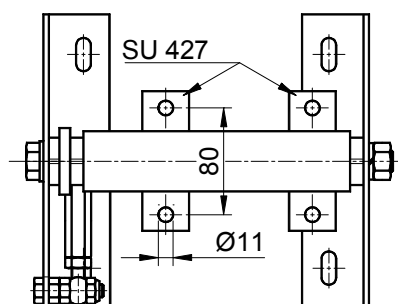


支撑电机的底盘费用由客户支付。

The baseplate supporting the motor is on charge of the customer.

### 电机底座用弹性组件 BM-T 40

#### Elastic element for BM-T 40 motor support

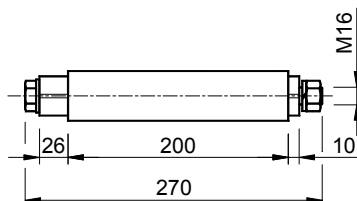

型号 Type	编号 n°	重量 Weight [Kg]
AR-PT 40 x 80	RE022480	1.10
AR-PT 40 x 120	RE022484	1.40
AR-PT 40 x 200	RE022492	1.60