


TEN BLOC 弹簧式弹性组件 - 型号 TB2-50 / Elastic spring Elements TEN BLOC - Type TB2-50

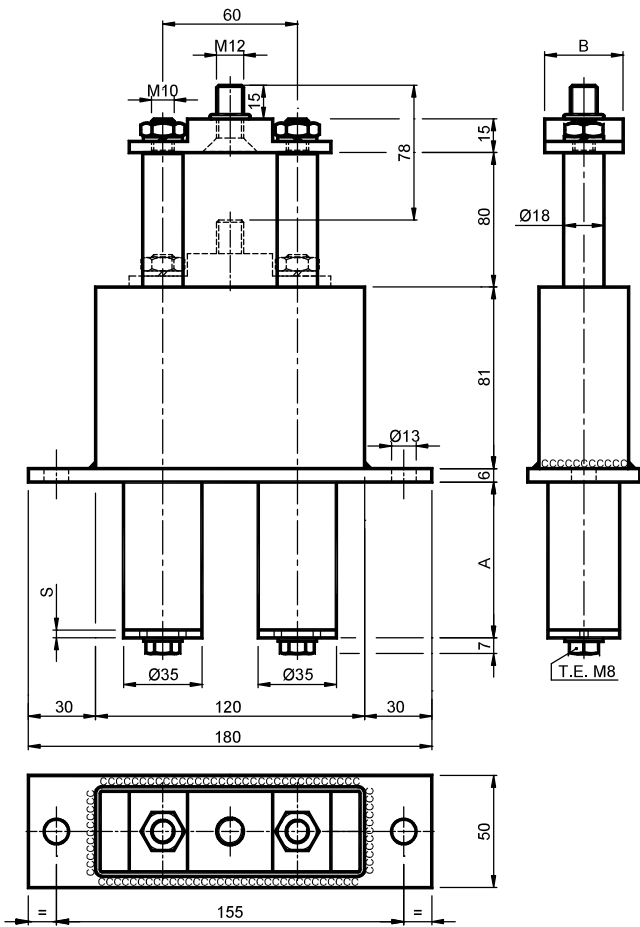

材料 内部主体为铝制。外部结构、圆柱、圆筒、螺钉和弹簧均为钢制。

处理 外部结构涂漆。圆柱、圆筒和螺钉镀锌，粗加工弹簧涂油。

应用 具有固定平面盒状主体中含弹簧的弹性组件。链条或皮带的游隙通过弹簧的运动自动补偿。这个组件的力量为单组件的两倍。在张紧装置的堵盖上已配备用于预加压操作的螺钉。

C: 张紧装置行程 78mm。

MATERIALS Aluminium internal structures. External structure steel, columns, cylinders, screws and springs made of steel.

TREATMENTS Painted external structure steel. Galvanised columns, cylinders and screws, greased raw springs.

USE Elastic element with spring in box structure with fixing surface. Chain or belt backlash is recovered automatically through the action of the springs; the strength of this element is double that of a single element. The tensioner already has screws in its stoppers for preloading.

Tensioner stroke 78 mm.

型号 Type	编号 N°	A	B	S	Newton	重量 Weight in Kg
TB2-50 2•10	TB013190	/	35	10	0 ÷ 200	2.10
TB2-50 2•20	TB013191	/	35	10	0 ÷ 340	2.10
TB2-50 2•30	TB013192	/	35	10	0 ÷ 500	2.10
TB2-50 2•40	TB013193	113.5	35	3.5	0 ÷ 800	2.30
TB2-50 2•50	TB013194	153.5	35	3.5	0 ÷ 1400	3.20
TB2-50 2•60	TB013195	213.5	35	3.5	0 ÷ 2000	3.60
TB2-50 2•70	TB013196	263.5	35	3.5	0 ÷ 3000	4.10
TB2-50 2•80	TB013197	263.5	35	3.5	0 ÷ 4000	4.10
TB2-50 2•90	TB013198	338.5	35	3.5	0 ÷ 5000	4.60

使用第 55 页的配件 2V 安装: / Assembled with the 2V kit of page 55:

型号	B	型号	B	型号	B
2V 2•40-5 S	20	2V 2•40-5 D	35	2V 2•40-5 T	35
2V 2•40-6 S	20	2V 2•40-6 D	35	2V 2•40-6 T	35
2V 2•50-7 S	25	2V 2•50-7 D	35	2V 2•50-7 T	35
2V 2•50-8 S	25	2V 2•50-8 D	35		
2V 2•60-9 S	25	2V 2•60-9 D	35		

