


ARCO 弹性组件 – 型号: AFG ($\pm 40^\circ$) / Elastic Elements ARCO – Type: AFG ($\pm 40^\circ$)

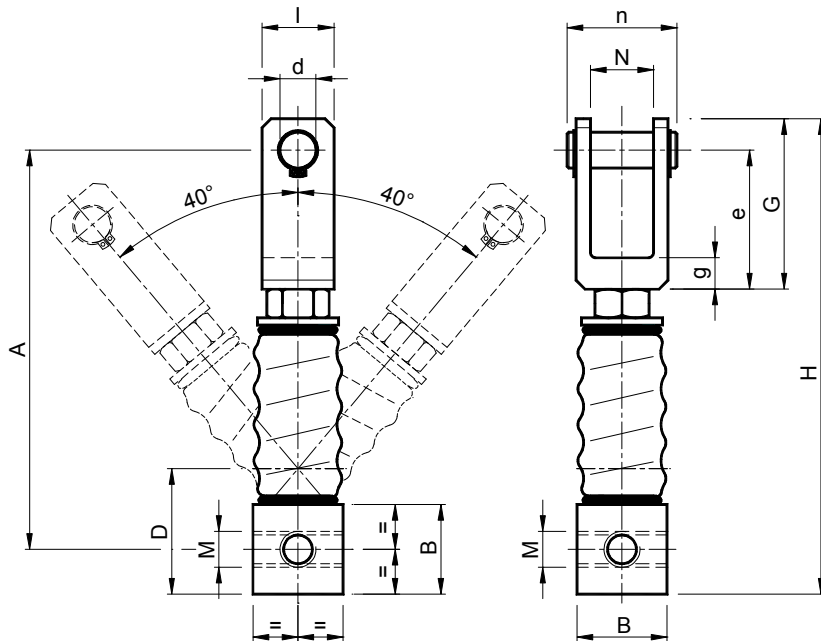

材料 钢。保护套为绝缘橡胶。支架可为铝制或钢制。

处理 钢制部分镀锌。内部弹簧为粗加工经涂油处理。铝制支架喷砂，钢制支架涂漆。

应用 扭转角度 $\pm 40^\circ$ 。橡皮保护套可保护弹簧不受外界侵蚀物侵袭，防止污垢在其内部累积。另外橡胶的作用在于吸收弹簧的大部分振动，并将其与其它部件绝缘。

工作温度从 -30°C 到 $+60^\circ\text{C}$ 。

MATERIALS Steel. Covering gaiter in insulated rubber. The fork can be made of aluminium or steel.


TREATMENTS The steel parts are galvanized. The spring inside is raw oiled. The aluminium fork is sandblasted, the steel one is painted.

USE Rotating angle $\pm 40^\circ$. The rubber covering gaiter allows to protect the spring from external agents and avoids that dirt may accumulate inside. The rubber has also the duty of absorbing the vibrations of the spring and of isolating the same from the other components.

Working temperature from -30°C to $+60^\circ\text{C}$.

$\pm 40^\circ$		型号 Type	编号 N°	A	B	D	G	H	I	M	N	d	e	g	n	Newton $0 \div 40^\circ$	重量 Weight in Kg
AFG	10	AR070142	116.5	25	35	75	144	30	M8	19	16	16	60	15	40	$0 \div 60$	0.33
AFG	10	AR070147	116.5	25	35	75	144	30	M8	37	16	16	60	15	60	$0 \div 60$	0.38
AFG	20	AR070152	139.5	25	35	75	167	30	M10	19	16	16	60	15	40	$0 \div 100$	0.39
AFG	20	AR070157	139.5	25	35	75	167	30	M10	37	16	16	60	15	60	$0 \div 100$	0.44
AFG	30	AR070162	139.5	25	35	75	167	30	M12	19	16	16	60	15	40	$0 \div 190$	0.39
AFG	30	AR070167	139.5	25	35	75	167	30	M12	37	16	16	60	15	60	$0 \div 190$	0.44
AFG	40	AR070172	177.5	35	50	85	210	30	M16	19	16	16	70	15	45	$0 \div 500$	0.83
AFG	40	AR070177	177.5	35	50	85	210	30	M16	37	16	16	70	15	65	$0 \div 500$	0.89
AFG	50	AR070182	222.5	50	70	95	265	40	M20	19	20	20	77.5	17.5	45	$0 \div 1100$	2.64
AFG	50	AR070187	222.5	50	70	95	265	40	M20	51	20	20	77.5	17.5	77	$0 \div 1100$	3.22
AFG	60	AR070192	290	70	95	125	345	50	M24	34	20	20	105	20	60	$0 \div 1800$	6.92
AFG	60	AR070197	290	70	95	125	345	50	M24	85	20	20	105	20	115	$0 \div 1800$	7.40

ARCO 弹性组件 – 型号: AFGN ($\pm 90^\circ$) / Elastic Elements ARCO – Type: AFGN ($\pm 90^\circ$)

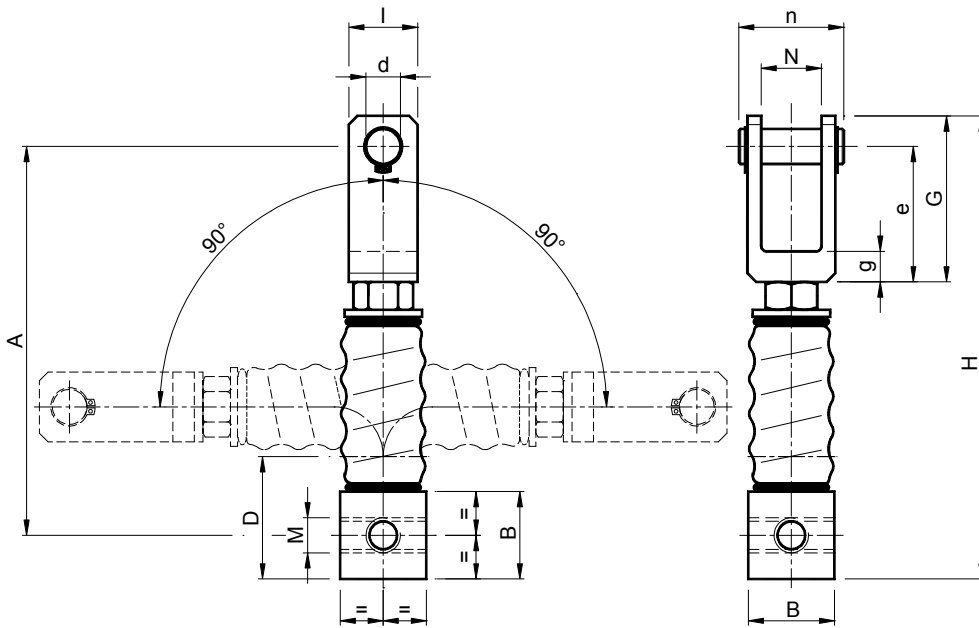

材料 钢。保护套为绝缘橡胶。支架可为铝制或钢制。

处理 钢制部分镀锌。内部弹簧为粗加工涂油处理。铝制支架喷砂，钢制支架涂漆。

应用 扭转角度 $\pm 90^\circ$ 。橡胶保护套可保护弹簧不受外界侵蚀物侵袭，防止污垢在其内部累积。

另外橡胶的作用在于吸收弹簧的大部分振动，并将其与其它部件绝缘。

工作温度从 -30°C 到 $+60^\circ\text{C}$ 。

MATERIALS Steel. Covering gaiter in insulated rubber. The fork can be made of aluminium or steel.

TREATMENTS The steel parts are galvanized. The spring inside is raw oiled. The aluminium fork is sandblasted, the steel one is painted.

USE Rotating angle $\pm 90^\circ$. The rubber covering gaiter allows to protect the spring from external agents and avoids that dirt may accumulate inside. The rubber has also the duty of absorbing the vibrations of the spring and of isolating the same from the other components.

Working temperature from -30°C to $+60^\circ\text{C}$.

± 90		A	B	D	G	H	I	M	N	d	e	g	n	Newton $0^\circ \div 90^\circ$	重量 Weight in Kg
型号 Type	编号 N°														
AFGN 10	AR070212	116.5	25	35	75	144	30	M8	19	16	60	15	40	0 ÷ 60	0.33
AFGN 10	AR070217	116.5	25	35	75	144	30	M8	37	16	60	15	60	0 ÷ 60	0.38
AFGN 20	AR070222	139.5	25	35	75	167	30	M10	19	16	60	15	40	0 ÷ 100	0.39
AFGN 20	AR070227	139.5	25	35	75	167	30	M10	37	16	60	15	60	0 ÷ 100	0.44
AFGN 30	AR070232	139.5	25	35	75	167	30	M12	19	16	60	15	40	0 ÷ 190	0.39
AFGN 30	AR070237	139.5	25	35	75	167	30	M12	37	16	60	15	60	0 ÷ 190	0.44
AFGN 40	AR070242	177.5	35	50	85	210	30	M16	19	16	70	15	45	0 ÷ 500	0.83
AFGN 40	AR070247	177.5	35	50	85	210	30	M16	37	16	70	15	65	0 ÷ 500	0.89
AFGN 50	AR070252	222.5	50	70	95	265	40	M20	19	20	77.5	17.5	45	0 ÷ 1100	2.64
AFGN 50	AR070257	222.5	50	70	95	265	40	M20	51	20	77.5	17.5	77	0 ÷ 1100	3.22
AFGN 60	AR070262	290	70	95	125	345	50	M24	34	20	105	20	60	0 ÷ 1800	6.92
AFGN 60	AR070267	290	70	95	125	345	50	M24	85	20	105	20	115	0 ÷ 1800	7.40