


## 弹性电机底座 / *Elastic motor supports*

**BM-T 尺寸 70 / BM-T Size 70:**

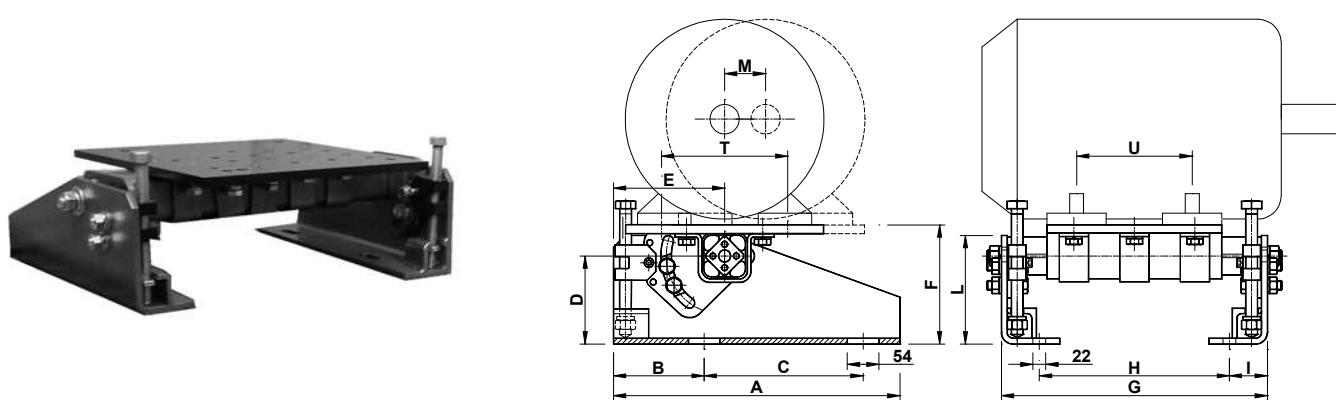


型号 Type	编号 n° Code	电机尺寸 Motor size	16.5 Hz kW	25 Hz kW	50 Hz kW	T	U	重量 Weight [Kg]
<b>BM-T 70x160</b>	<b>RE022400</b>	D 132S D 132M	3.00 4.00-5.50	5.50 7.50	5.5-7.50 /	216 216	140 178	35.50
<b>BM-T 70x200</b>	<b>RE022404</b>	D 160M D 160L	7.50 11.00	11.00 15.00	11.00-15.00 18.50	254 254	210 254	40.70
<b>BM-T 70x270</b>	<b>RE022411</b>	D 180M D 180L	/ 15.00	18.50 22.00	22.00 /	279 279	241 279	45.10
<b>BM-T 70x400</b>	<b>RE022424</b>	D 200L	18.50-22.00	30.00	30.00-37.00	318	305	54.10
<b>BM-T 70x500</b>	<b>RE022434</b>	D 225S D 225M	/ 30.00	37.00 45.00	/ 45.00	356 356	286 311	61.60

型号 Type	A	B	C	D	E	F	G	H	I	L	M
<b>BM-T 70x160</b>	490	155	272	150	190	204	355	225	65	185	43
<b>BM-T 70x200</b>	490	155	272	150	190	204	455	325	65	185	45
<b>BM-T 70x270</b>	490	155	272	150	190	204	455	325	65	185	72
<b>BM-T 70x400</b>	490	155	272	150	190	204	555	425	65	185	72
<b>BM-T 70x500</b>	490	155	272	150	190	204	605	475	65	185	72

弹性组件的中心轴为铝制，其他部件均为镀锌钢制。

电机底盘提供将电机在与弹性组件相应的中心位置或悬垂位置安装的可能 (距离 M)。

 *The pin of the elastic element is an aluminium section bar, while all the remaining components are in oven-painted steel. The baseplate supporting the motor plans the possibility to assembly the motor both in the central position with respect to elastic component and in the overhanging one (M dimension).*

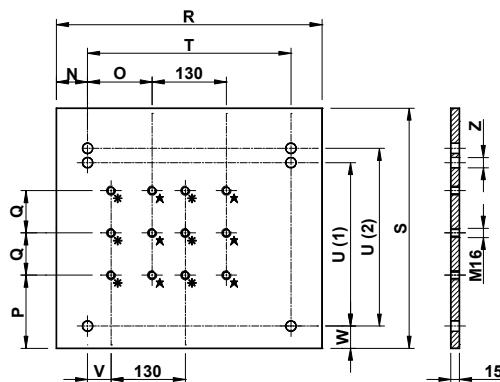

BM-T 70 支撑电机底盘 (已包括) / Motor supporting baseplate for BM-T 70:

Z: 电机定位 / Motor positioning

\*: 悬垂定位 / Overhanging positioning


★: 中心定位 / Central positioning

型号 Type	N	O	P	Q	R	S	T	U(1)	U(2)	V	W	Z	重量 Weight [Kg]
BM-T 70x160	26	43	64	120	270	230	216	140	178	/	24	M10	7.80
BM-T 70x200	28	62	69	130	310	310	254	210	254	17	29	Ø13	12.10
BM-T 70x270	35.5	74.5	74	80	350	350	279	241	279	2.5	34	Ø13	15.40
BM-T 70x400	43.5	94	85	55	405	375	318	267	305	22	34	Ø18	19.10
BM-T 70x500	54.5	113	54	74	465	420	356	286	311	41	39	Ø18	24.50

### SM 750 电机底座用弹性组件

(包括万向支座)

Elastic element for BM-T 70 motor support  
(inclusive of cardanic support)

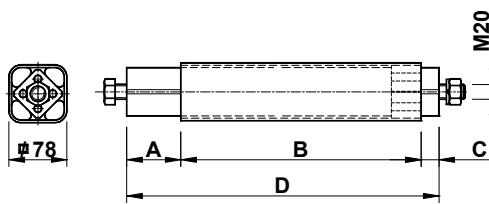

型号 Type	编号 n°	A	B	C	D	重量 Weight [Kg]
AR-PT 70x160 CE073120		68	243	24	335	5.0
AR-PT 70x200 CE073124		153	258	24	435	6.0
AR-PT 70x270 CE073131		100	311	24	435	6.5
AR-PT 70x400 CE073144		73	438	24	535	5.5
AR-PT 70x500 CE073154		25	536	24	585	9.9

### 弹性电机底座方案:

为了制造弹性电机底座，可以使用由夹具 SC 固定的模块式弹性组件 AC-T。 用户可制造一个电机底盘，在上面焊接一个可插入弹性组件 AC-T 内部方管的薄片。

在使用一个钩形扳手将弹性组件 AC-T 预加载荷付与皮带适当的张力后，可以将夹具 SC 上的螺钉拧紧，通过摩擦阻止扭转，有必要的部位，可插入防滑销。我们的商业部和技术部可随时协助您进行正确的选择。

### UK Solutions for elastic motor supports:

To built simple elastic motor supports, You can use the AC-T modular elastic elements constrained by the SC clamps. The customer can built a baseplate supporting the motor at which he will have to weld a shape that could enter in the inner squares of the AC-T elastic elements.

After You have carry the belts at the right tension, preloading by a pin wrench the AC-T elastic elements, You can stop the rotation with the friction, tightening the screws on the SC clamps and, where it is necessary, You have to insert nonskid pins. Our Export and Technical Department will be at Your disposal to help You in Your choises.

