

Zubehör für Kettenspanner Typ ST / Accessories for chain tighteners type ST


Gleitsegment von halbrundem Profil, ideal für geringe Achsabstände und eine Montage nah am Treibrad.
 Material: Polyethylen mit hoher Molekulardichte
 Betriebsgeschwindigkeit ≤20 m/min.


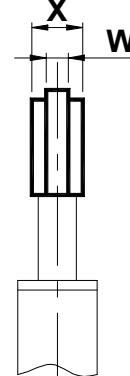

Temperatura di lavoro ≤70°C.

Semi-circular sliding block suitable for reduced interaxis or for installation closed to the pinion.

Material: Polyethylene with high molecular density.

Operating speed ≤20 m/min.

Operating temperature ≤70°C.


Einfach S
Simplex S

Doppelt D
Duplex D


Typ Type	Code S	Code D					Gewicht Weight in kg	
			R	W	X	Y	S	D
ST1 8mm	AS010584	AS010599	35	2.5	16	16	0.03	0.03
ST1-2 3/8"	AS010585	AS010600	35	5	16	18	0.03	0.03
ST1-2 1 1/2"	AS010586	/	35	7	16	/	0.03	0.03

Zubehör für Kettenspanner Typ STT / Accessories for chain tighteners type STT

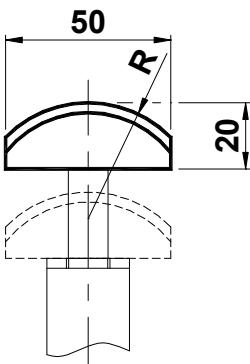
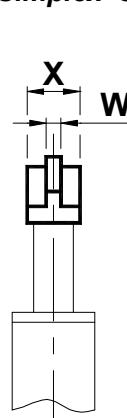


Gleitsegment von halbrundem Profil, ideal für geringe Achsabstände und eine Montage nah am Treibrad.
 Material: Polyethylen mit hoher Molekulardichte
 Betriebsgeschwindigkeit ≤20 m/min.
 Betriebstemperatur ≤70°C.

Semi-circular sliding block suitable for reduced interaxis or for installation closed to the pinion.

Material: Polyethylene with high molecular density.

Operating speed ≤20 m/min.

Operating temperature ≤70°C.


Einfach S
Simplex S

Doppelt D
Duplex D


Typ Type	Code S	Code D					Gewicht Weight in kg	
			R	W	X	Y	S	D
STT 1 8mm	AS010750	AS010755	35	2.5	16	16	0.03	0.03
STT 1 3/8"	AS010751	AS010756	35	5	16	18	0.03	0.03
STT 1 1/2"	AS010752	/	35	7	16	/	0.03	0.03