


Tabella di scelta KIT / KIT selection table


Catena-Chain-DIN 8187		Tipo-Type						TAGLIA SIZE	Tipo-Type		Larghezza Max.cinghia MAX.belt width
ISO	Passo Pitch	VJ	LJ	OVJ	RJ	NJ	KJ		PJ	UJ	
		 Pag.95	 Pag.96	 Pag.97	 Pag.98	 Pag.99	 Pag.100	 Pag. 92-93	 Pag.101	 Pag.101	
05-B1	8mm	VJ10-0S	LJ10-0S		RJ10-0S			10	PJ1	UJ1	30
06-B1	3/8" x 7/32"	VJ10-1S	LJ10-1S	OVJ10-1 S	RJ10-1S			10			
06-B1	3/8" x 7/32"					NJ20-1S	KJ20-1S	20			
06-B1	3/8" x 7/32"					NJ30-1S	KJ30-1S	30			
08-B1	1/2" x 5/16"	VJ20-2S	LJ20-2S	OVJ20-2 S	RJ20-2S			20	PJ2/3	UJ2/3	40
08-B1	1/2" x 5/16"	VJ30-2S	LJ30-2S	OVJ30-2 S	RJ30-2S	NJ30-2S	KJ30-2S	30	PJ2/3	UJ2/3	40
10-B1	5/8" x 3/8"	VJ30-3S	LJ30-3S	OVJ30-3 S	RJ30-3S	NJ30-3S		30			
10-B1	5/8" x 3/8"					NJ40-3S	KJ40-3S	40	PJ4	UJ4	55
12-B1	3/4" x 7/16"	VJ30-4S	LJ30-4S	OVJ30-4 S	RJ30-4S	NJ30-4S		30			
12-B1	3/4" x 7/16"	VJ40-4S	LJ40-4S	OVJ40-4 S	RJ40-4S	NJ40-4S	KJ40-4S	40			
16-B1	1" x 17.02mm	VJ40-5S	LJ40-5S		RJ40-5S	NJ40-5S	KJ40-5S	40			
05-B2	8mm	VJ10-0D	LJ10-0D		RJ10-0D			10			
06-B2	3/8" x 7/32"	VJ10-1D	LJ10-1D	OVJ10-1 D	RJ10-1D			10			
06-B2	3/8" x 7/32"					NJ20-1D	KJ20-1D	20			
06-B2	3/8" x 7/32"					NJ30-1D	KJ30-1D	30			
08-B2	1/2" x 5/16"	VJ20-2D	LJ20-2D	OVJ20-2 D	RJ20-2D			20			
08-B2	1/2" x 5/16"	VJ30-2D	LJ30-2D	OVJ30-2 D	RJ30-2D	NJ30-2D	KJ30-2D	30			
10-B2	5/8" x 3/8"	VJ30-3D	LJ30-3D	OVJ30-3 D	RJ30-3D	NJ30-3D		30			
10-B2	5/8" x 3/8"					NJ40-3D	KJ40-3D	40			
12-B2	3/4" x 7/16"	VJ30-4D	LJ30-4D	OVJ30-4 D	RJ30-4D			30			
12-B2	3/4" x 7/16"	VJ40-4D	LJ40-4D	OVJ40-4 D	RJ40-4D	NJ40-4D	KJ40-4D	40			
06-B3	3/8" x 7/32"	VJ20-1T	LJ20-1T	OVJ20-1 T	RJ20-1T			20			
06-B3	3/8" x 7/32"						KJ30-	30			
08-B3	1/2" x 5/16"	VJ30-2T	LJ30-2T	OVJ30-2 T	RJ30-2T			30			
08-B3	1/2" x 5/16"					NJ40-2T	KJ40-	40			

Foto applicazioni / Application photos:

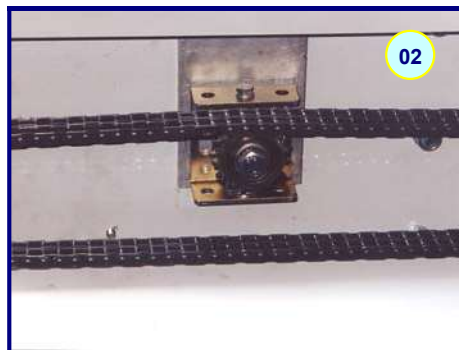

KIT per tendicatena / KIT for chain tensioners

Pignone tendicatena (con cuscinetto) - Tipo:KJ
Sprocket wheel set (with ball bearing) - Type:KJ

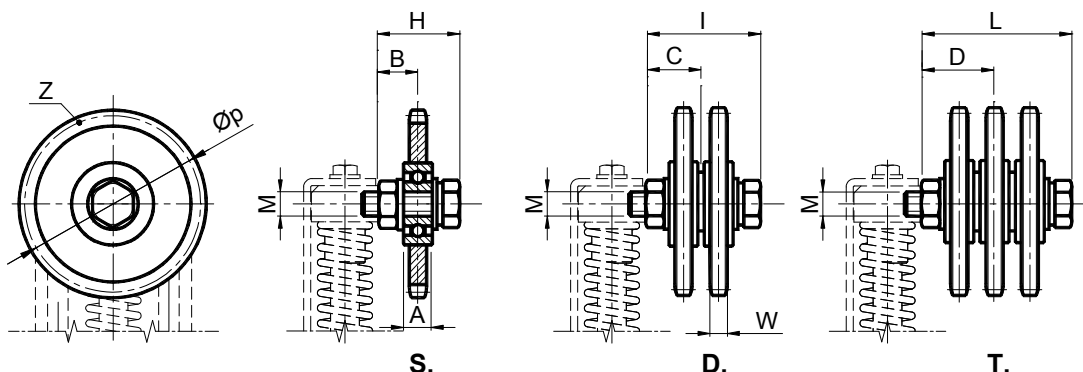

MATERIALI Corona, bulloneria e cuscinetto in acciaio.

TRATTAMENTI Corona e bulloneria con trattamento di zincatura.

IMPIEGO Il pignone è costituito da una corona in acciaio, montata su cuscinetti unificati. Velocità di lavoro ≤60m/min. Temperatura di lavoro ≤100°C.

MATERIALS Crown, bush, bolts and nuts and bearing made of steel.

TREATMENTS Galvanized crown and bolts and nuts.

USE The sprocket consists of a steel crown, installed on standard bearings.

Operating speed ≤60m/min.

Operating temperature ≤100°C.



Tipo Type	S Cod. N°	D Cod. N°	T Cod. N°	Catena Chain	Taglia Size	A	B	C	D	H	I	L	M	Øp	W	Z	Peso Weight in kg		
																	S.	D.	T.
KJ 20-1	JE010420	JE010434		3/8" x 7/32"	20	9	14.5	20		30.2	41.2		M10	45.81	5.3	15	0.10	0.22	
KJ 30-1	JE010420	JE010434	JE010445	3/8" x 7/32"	30	9	14.5	20	23.5	30.2	41.2	50.2	M10	45.81	5.3	15	0.10	0.22	
KJ 30-2	JE010422	JE010436		1/2" x 5/16"	30	9	14.5	19		30.2	41.2		M10	61.09	7.2	15	0.19	0.36	0.25
KJ 40-2			JE010447	1/2" x 5/16"	40	12			25.5			52.0	M12	61.09	7.2	15			
KJ 40-3	JE010424	JE010438		5/8" x 3/8"	40	12	15.5	24		32.0	51.5		M12	76.36	9.1	15	0.35	0.58	0.50
KJ 40-4	JE010426	JE010440		3/4" x 7/16"	40	12	15.5	25		32.0	51.5		M12	91.63	11.1	15	0.55	0.98	
KJ 40-5	JE010428			1" x 17.02	40	15	17.0			37.5			M12	106.12	16.2	13	1.12		

Esempio di applicazione / Application Example

