
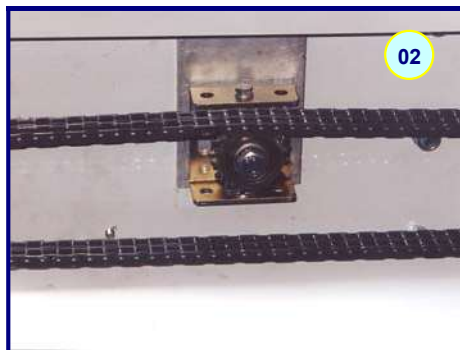


**Tabella di scelta KIT / KIT selection table**


Catena-Chain-DIN 8187		Tipo-Type						TAGLIA SIZE	Tipo-Type		Larghezza Max.cinghia MAX.belt width
ISO	Passo Pitch	VJ	LJ	OVJ	RJ	NJ	KJ		PJ	UJ	
		 Pag.95	 Pag.96	 Pag.97	 Pag.98	 Pag.99	 Pag.100	 Pag. 92-93	 Pag.101	 Pag.101	
05-B1	8mm	VJ10-0S	LJ10-0S		RJ10-0S			10	PJ1	UJ1	30
06-B1	3/8" x 7/32"	VJ10-1S	LJ10-1S	OVJ10-1 S	RJ10-1S			10			
06-B1	3/8" x 7/32"					NJ20-1S	KJ20-1S	20			
06-B1	3/8" x 7/32"					NJ30-1S	KJ30-1S	30			
08-B1	1/2" x 5/16"	VJ20-2S	LJ20-2S	OVJ20-2 S	RJ20-2S			20	PJ2/3	UJ2/3	40
08-B1	1/2" x 5/16"	VJ30-2S	LJ30-2S	OVJ30-2 S	RJ30-2S	NJ30-2S	KJ30-2S	30	PJ2/3	UJ2/3	40
10-B1	5/8" x 3/8"	VJ30-3S	LJ30-3S	OVJ30-3 S	RJ30-3S	NJ30-3S		30			
10-B1	5/8" x 3/8"					NJ40-3S	KJ40-3S	40	PJ4	UJ4	55
12-B1	3/4" x 7/16"	VJ30-4S	LJ30-4S	OVJ30-4 S	RJ30-4S	NJ30-4S		30			
12-B1	3/4" x 7/16"	VJ40-4S	LJ40-4S	OVJ40-4 S	RJ40-4S	NJ40-4S	KJ40-4S	40			
16-B1	1" x 17.02mm	VJ40-5S	LJ40-5S		RJ40-5S	NJ40-5S	KJ40-5S	40			
05-B2	8mm	VJ10-0D	LJ10-0D		RJ10-0D			10			
06-B2	3/8" x 7/32"	VJ10-1D	LJ10-1D	OVJ10-1 D	RJ10-1D			10			
06-B2	3/8" x 7/32"					NJ20-1D	KJ20-1D	20			
06-B2	3/8" x 7/32"					NJ30-1D	KJ30-1D	30			
08-B2	1/2" x 5/16"	VJ20-2D	LJ20-2D	OVJ20-2 D	RJ20-2D			20			
08-B2	1/2" x 5/16"	VJ30-2D	LJ30-2D	OVJ30-2 D	RJ30-2D	NJ30-2D	KJ30-2D	30			
10-B2	5/8" x 3/8"	VJ30-3D	LJ30-3D	OVJ30-3 D	RJ30-3D	NJ30-3D		30			
10-B2	5/8" x 3/8"					NJ40-3D	KJ40-3D	40			
12-B2	3/4" x 7/16"	VJ30-4D	LJ30-4D	OVJ30-4 D	RJ30-4D			30			
12-B2	3/4" x 7/16"	VJ40-4D	LJ40-4D	OVJ40-4 D	RJ40-4D	NJ40-4D	KJ40-4D	40			
06-B3	3/8" x 7/32"	VJ20-1T	LJ20-1T	OVJ20-1 T	RJ20-1T			20			
06-B3	3/8" x 7/32"						KJ30-	30			
08-B3	1/2" x 5/16"	VJ30-2T	LJ30-2T	OVJ30-2 T	RJ30-2T			30			
08-B3	1/2" x 5/16"					NJ40-2T	KJ40-	40			

**Foto applicazioni / Application photos:**

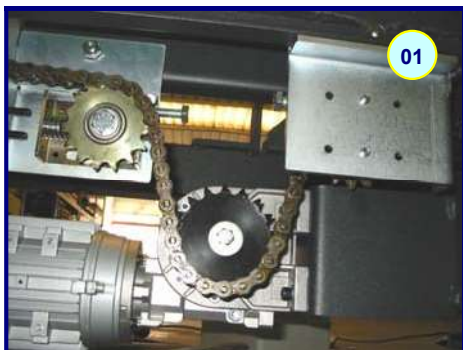

**KIT per tendicatena / KIT for chain tensioners**

Pattino in polietilene - Tipo: **OVJ** / Polyethylene sliding block - Type: **OVJ**

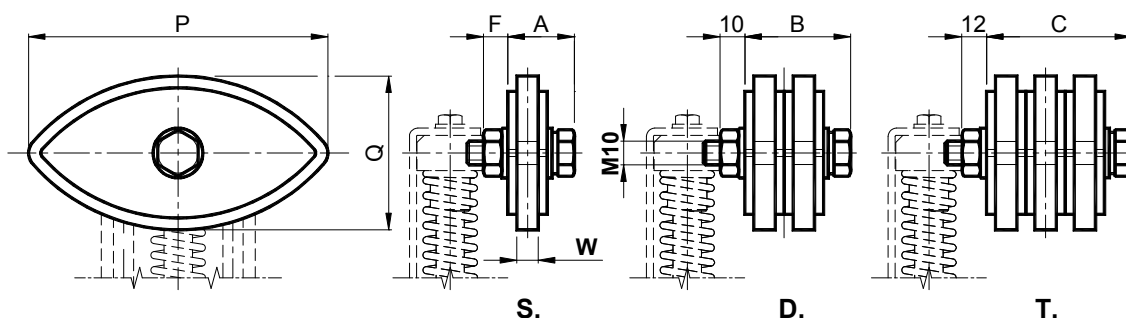

**MATERIALI** Pattino in polietilene ad alta densità molecolare. Bulloneria in acciaio zincato.

**IMPIEGO** Pattino **OV** a profilo ovale indicato per medi e grandi interassi.

Velocità di lavoro  $\leq 20\text{m/min}$ .

Temperatura di lavoro del pattino  $\leq 70^\circ\text{C}$ .

**MATERIALS** Polyethylene sliding block, high molecular density. Bolts and nuts made of galvanized steel.

**USE** Oval sliding block **OV** suitable for middle-size and large interaxis.

Operating speed  $\leq 20\text{m/min}$ .

Sliding block operating temperature  $\leq 70^\circ\text{C}$ .



Tipo Type	S Cod. N°	D Cod. N°	T Cod. N°	Catena Chain	Taglia Size	A	B	C	F	H	L	P	Q	W	Peso Weight in kg		
															S.	D.	T.
<b>OVJ 10-1</b>	JE010451	JE010472		3/8" x 7/32"	10	22	32		10	10		75	40	5	0.09	0.10	
<b>OVJ 20-1</b>			JE010490	3/8" x 7/32"	20			40			12	75	40	5			0.13
<b>OVJ 20-2</b>	JE010453	JE010474		1/2" x 5/16"	20	25	39		10	10		96	50	7	0.10	0.10	
<b>OVJ 30-2</b>	JE010453	JE010474	JE010492	1/2" x 5/16"	30	25	39	53	10	10	12	96	50	7	0.10	0.10	0.14
<b>OVJ 30-3</b>	JE010456	JE010477		5/8" x 3/8"	30	28	45		12	10		126	65	9	0.12	0.12	
<b>OVJ 30-4</b>	JE010458	JE010479		3/4" x 7/16"	30	31	50		10	10		148	74	11	0.12	0.12	
<b>OVJ 40-4</b>	JE010458	JE010479		3/4" x 7/16"	40	31	50		10	10		148	74	11	0.15	0.15	

Esempio di applicazione / Application Example

