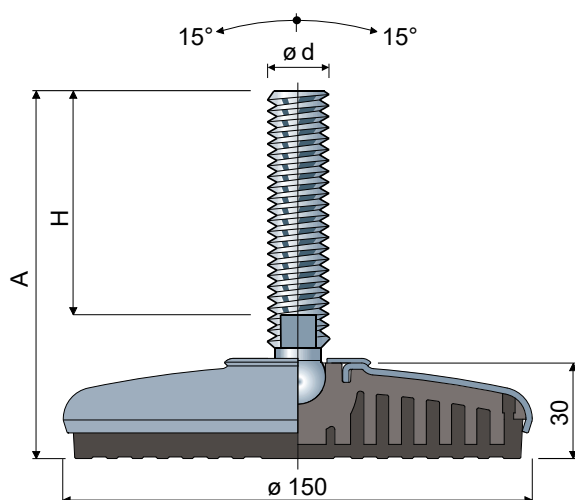


Articulated feet sanitizable (stainless steel base) ø 150 - Part. PO26
Piedi sanificabili snodati (base in acciaio inox) ø 150 - Part. PO26

Spindle measures in mm / Misure stelo in mm

ø d	A	H	Wrench Chiave	Spindle and base in stainless steel AISI 304 Stelo e base in acciaio inox AISI 304		Max static load Carico statico (N)
				Type/Tipo	Code/Codice	
M20x2,5	137	86	17	PO26A	CPB01478	33000
	167	116	17	PO26B	CPB01479	
	192	141	17	PO26C	CPB01480	
	212	161	17	PO26Q	CPA00953	
	249	198	17	PO26D	CPB01481	
M24x3	147	96	19	PO26E	CPB01482	35000
	173	122	19	PO26F	CPB01483	
	203	152	19	PO26G	CPB01484	
	233	182	19	PO26H	CPB01485	
	351	300	19	PO26I	CPB01486	
M30x3,5	195	144	24	PO26L	CPB01487	38000

Washers/Rosette UNI 6592-69

ø M	M20	M24	M30
S mm	3	4	4
ø A mm	37	44	56
Code/Codice IN	CP007292	CP007294	CP007296

BASE MATERIAL: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of thermoplastic rubber 68 Shore black colour.

FEATURES: Co-moulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

Nuts/Dadi UNI 5588-65

ø d	M20	M24	M30
S mm	16	19	24
Ch. mm	30	36	46
Code/Codice IN	CP007278	CP007280	CP007282

MATERIALE BASE: Anima interna in poliammide + FV; rivestimento esterno in acciaio inox AISI 304; antivibrante in gomma termoplastica 68 shore colore nero.

CARATTERISTICHE: L'antivibrante costampato consente una perfetta aderenza con la base in acciaio. La conseguente aderenza di cavità interne rende il piede estremamente sanificabile.